


PERFORATED METAL

DIRECT METALS®



We manufacture in accordance with NAAMM Standards

ISO 9001:2015 CERTIFIED

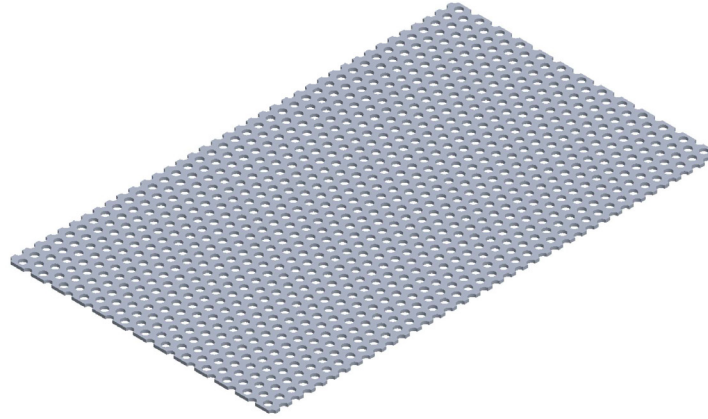

PERFORATED METAL - 3/32" Round on 5/32" Staggered Centers

Product Line	Perforated Metal
Hole Type	Round
Primary Material	Aluminum (AL)
Alloy, Grade or Type	Alloy 3003-H14 (3003H14)
Material Finish	Mill Finish
Gauge Thickness	20 Gauge (.0320" Thick)
Hole Pattern	3/32" Round on 5/32" Staggered Centers
Hole Size (Diameter)	3/32"
Hole Centers	5/32"
Bar Width	1/16"
Hole Arrangement	60° Staggered Centers
Holes per Square Inch (HPSI)	47.80
Straight Rows Parallel to	Length of Sheet
Margins Parallel to Width	Sheared Through Both Ends
Margins Parallel to Length	Minimum Solid Both Sides
End Pattern	Sheared Through Both Ends
Percent Open Area	33%
Weight	0.30 Lbs./Square Foot
Product Form	Sheet
Sizes (Width x Length)	48" x 120"

Direct Metals® Company, LLC makes no representation or warranty (express or implied) regarding these drawings as they are conceptual in nature. It is the customer's responsibility to have all information and products verified to determine the suitability for the application. The customer assumes all risk and liability for any losses, claims or damage resulting from such use. Certain numbers may be rounded up or down for example purposes.