


BAR GRATING

DIRECT METALS®



We manufacture in accordance with NAAMM Standards

ISO 9001:2015 CERTIFIED

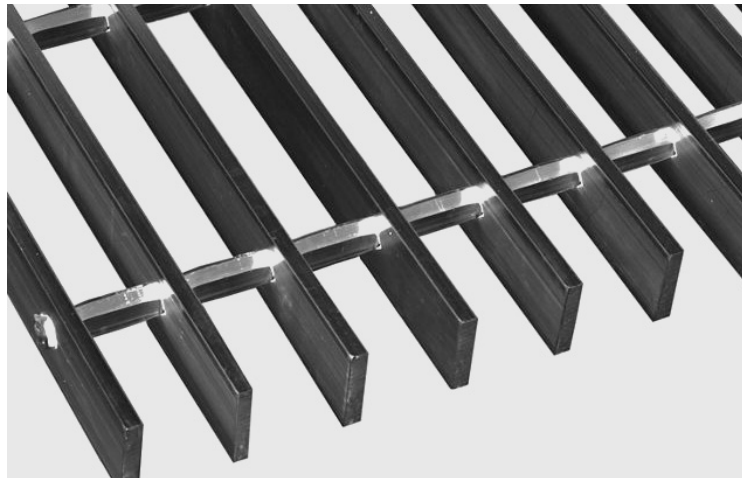

BAR GRATING - 1-1/2" x 1/4" I-Bar, Grooved Surface

Product Line	Bar Grating
Construction Type	Swage-Locked
Bearing Bar Shape	I-Bar
Series Type & Name	GIA-150 (19-SI-4)
Product Spacing	19-SI-4
Primary Material	Aluminum (AL)
Alloy, Grade or Type	Alloy 6063-T6 (6063T6)
Material Finish	Mill Finish
Bearing Bar Size & Shape	1-1/2" Height x 1/4" Thick I-Bar
Bearing Bar Height	1-1/2"
Bearing Bar Thickness	1/4"
Bearing Bar Spacing	1-3/16" on Center
Clear Space Between Bearing Bars	15/16"
Product Surface	Grooved
Bearing Bar Direction (Span)	Parallel to Length of Panel
Cross Bar Type	Square Rod
Cross Bar Spacing	4" on Center
Percent Open Area	75%
Weight	2.60 Lbs./Square Foot
Product Form	Panel
Sizes (Width x Length)	36" x 288"

Direct Metals® Company, LLC makes no representation or warranty (express or implied) regarding these drawings as they are conceptual in nature. It is the customer's responsibility to have all information and products verified to determine the suitability for the application. The customer assumes all risk and liability for any losses, claims or damage resulting from such use. Certain numbers may be rounded up or down for example purposes.